


## Features


- System designed for water tight installation
- Resists heavy duty loads
- Ideal for bridges as well as commercial kitchens
- EPDM / Neoprene Seal can be replaced easily and without much tools
- Resistant to -40 C to +150 C ambient temperature
- Available in 304 or 316 grade, Stainless Steel
- Resistant to salt and waste water
- System designed for heavy duty application
- Firmly anchored EPDM / Neoprene Seal is ideal for movement tractability as well as water tightness
- System suitable for minor seismic movements
- No bump structure is ADA compliant

### Straight Application AOS

- AO Series
- EXT. Application
- INT. Application
- Heavy Duty
- Water
- Thermal Movement
- FLOOR USE

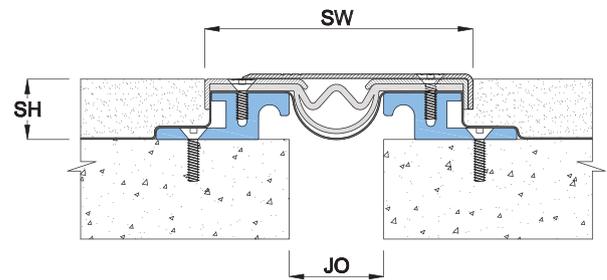

### Straight Application AOC

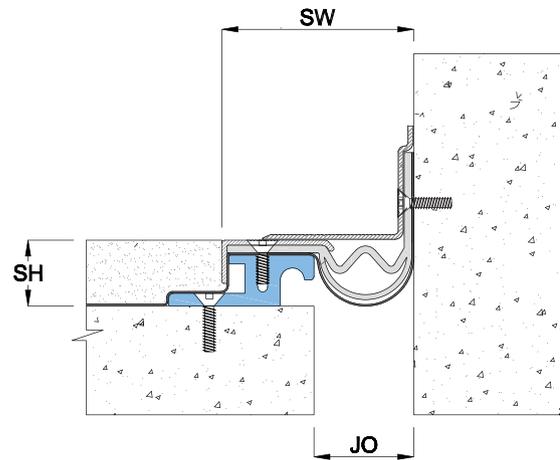

## Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	AOS 01	25	33	124	50	50	*	5
	AOS 02	51	33	145	50	50	*	5
	AOS 03	76	33	172	50	50	*	5
	AOS 04	102	33	196	50	50	*	5
Corner (C)	AOC 01	25	33	74	50	50	*	5
	AOC 02	51	33	96	50	50	*	5
	AOC 03	76	33	123	50	50	*	5
	AOC 04	102	33	148	50	50	*	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.