


Features

- Available in 2 or 3 hour fire rating in accordance with UL2079 hose stream test and ASTM E1399, ASTM E1966 and ASTM E119
- Additional fire stopping systems like Mineral Wool, Fire Rated Sealant and Ceramic Fire Blanket are not required
- The ZAS Series Fire-Rated system is designed to cover both sides of the joint opening
- Meets acoustic requirements range up to 72 STC
- Supplied pre-compressed for easy installation
- High-temperature & UV stabilized
- Energy-efficient, Watertight and Sound-attenuating capability

Straight / Corner Application ZAS

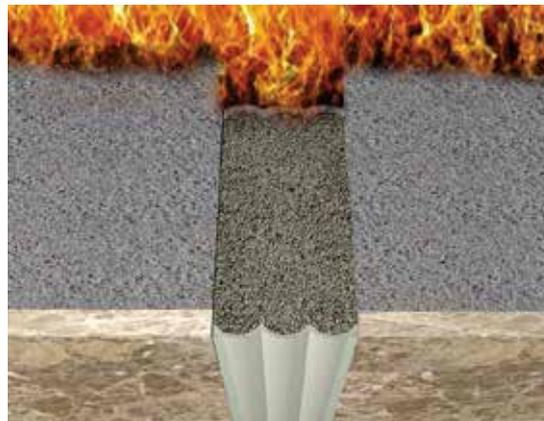


ZA
Series

Seismic
Movement

FIRE
Barrier

FLOOR
USE

WALL
USE

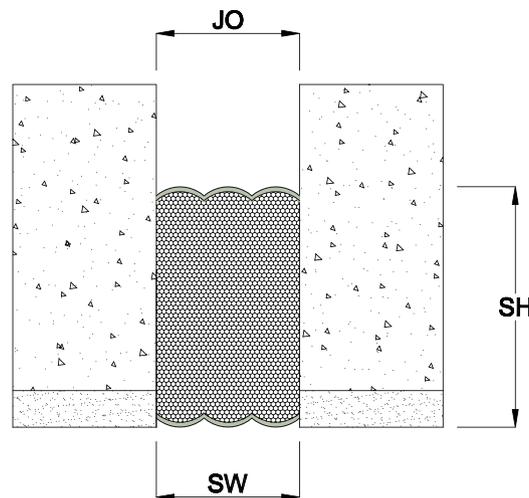

Details

Usage : Floor/Wall

Joint width : 1" - 6"

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight / Corner	ZAS 01	25	100	25	50	50	Excellent	*
	ZAS 02	51	100	51	50	50	Excellent	*
	ZAS 03	76	100	76	50	50	Excellent	*
	ZAS 04	102	100	102	50	50	Excellent	*
	ZAS 05	127	100	127	50	50	Excellent	*
	ZAS 06	152	100	152	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.