
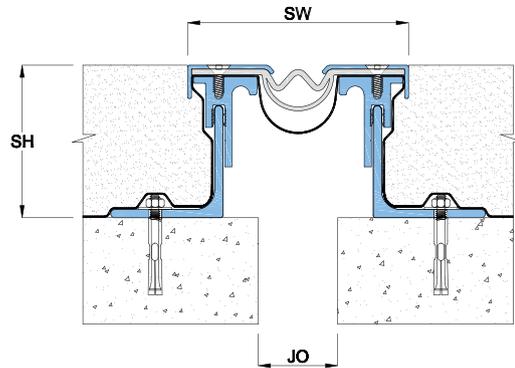


Features


- System designed for water tight installation
- Resists heavy duty loads
- Ideal for bridges as well as commercial kitchens
- EPDM / Neoprene Seal can be replaced easily and without much tools
- Resistant to -40°C to +150°C ambient temperature
- Available in Aluminum
- Resistant to salt and waste water
- System designed for heavy duty application
- Firmly anchored EPDM / Neoprene Seal is ideal for movement tractability as well as water tightness
- System suitable for minor seismic movements
- No bump structure is ADA compliant
- System specially designed to accommodate sub-floors of variable heights of (*) 2-3/4" (70mm), 3-3/20" (80mm), & 4-3/25" (105mm)

- AN Series
- EXT. Application
- INT. Application
- Heavy Duty
- Water
- Thermal Movement
- FLOOR USE

Straight Application ANS

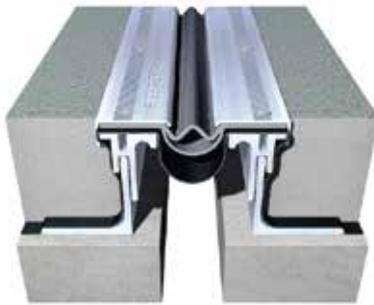

Corner Application ANC

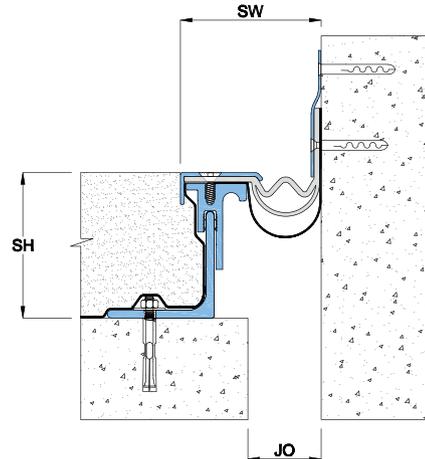

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	ANS 01	25	*	122	50	50	-	5
	ANS 02	51	*	143	50	50	-	5
	ANS 03	76	*	170	50	50	-	5
	ANS 04	102	*	194	50	50	-	5
Corner (C)	ANC 01	25	*	74	50	50	-	5
	ANC 02	51	*	96	50	50	-	5
	ANC 03	76	*	123	50	50	-	5
	ANC 04	102	*	148	50	50	-	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.