


Features

- System designed for external / internal floors
- Neoprene/EPDM Seal for car parks and bridge decks
- Provides excellent impermeability
- Excellent for seamless installation in curves and radius
- UV stabilized
- System allows limited seismic movements
- For smooth vehicular / pedestrian movement, install leveled to floor
- Use epoxy adhesive for secure installation
- Install on concrete up-stand for leveled installation

Straight / Corner Application KBS



- KB Series
- EXT. Application
- INT. Application
- Thermal Movement
- FLOOR USE

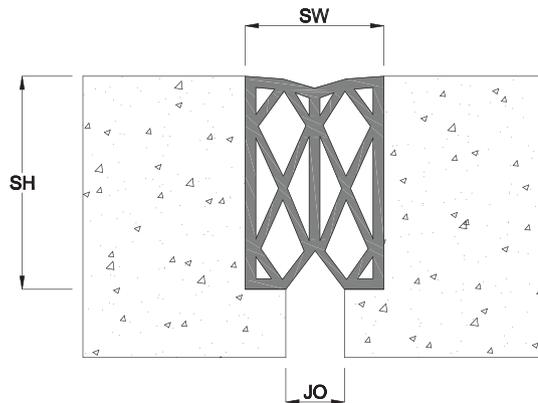

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

| Application | Code | JO | SH | SW | ± Movement (%) | | | Load (Ton) |
|-------------------|--------|-----|-----|-----|----------------|----------|-----------|------------|
| | | | | | Horizontal | Vertical | Shear | |
| Straight / Corner | KBS 01 | 25 | 38 | 46 | 25 | 10 | Excellent | * |
| | KBS 02 | 51 | 87 | 80 | 25 | 10 | Excellent | * |
| | KBS 03 | 76 | 99 | 110 | 25 | 10 | Excellent | * |
| | KBS 04 | 102 | 120 | 130 | 25 | 10 | Excellent | * |

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.