

Features

- Surface mounted system designed for retrofit installation
- Firmly fixed Santoprene gasket ideal for movement tractability without shearing or breaking
- System suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- Unique design for gypsum board dry-walls
- Vapor and Fire Barriers are optionally available

Straight Application AMS



AM Series


INT. Application

Thermal Movement

WALL USE

CEILING USE

Corner Application AMC

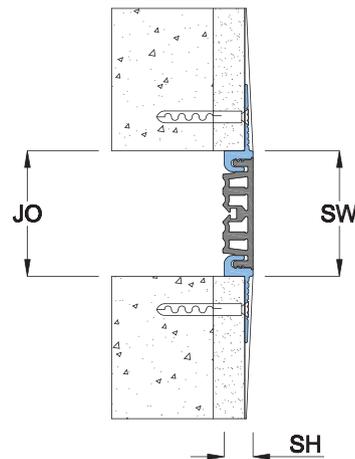


Seal Colors:

BK

BG

WH

GY

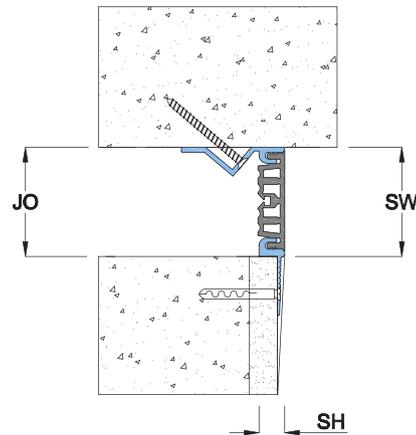

Details

Usage : Wall/Ceiling

Joint width : 1" - 3"

Optional : Vapor/Fire Barrier

| Application | Code | JO | SH | SW | ± Movement (%) | | | Load (Ton) |
|--------------|--------|----|----|----|----------------|----------|-------|------------|
| | | | | | Horizontal | Vertical | Shear | |
| Straight (S) | AMS 01 | 25 | 11 | 25 | 25 | 25 | Minor | * |
| | AMS 02 | 51 | 11 | 51 | 25 | 25 | Minor | * |
| | AMS 03 | 76 | 11 | 76 | 25 | 25 | Minor | * |
| Corner (C) | AMC 01 | 25 | 11 | 25 | 25 | 25 | Minor | * |
| | AMC 02 | 51 | 11 | 51 | 25 | 25 | Minor | * |
| | AMC 03 | 76 | 11 | 76 | 25 | 25 | Minor | * |

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.