
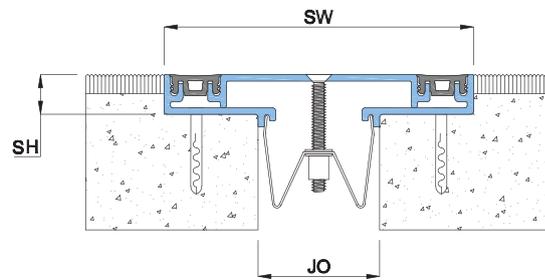


Features

- System designed to be installed in recessed floor
- Stainless Steel central spring clips / flanges allows swift shift between positive and negative movements
- Firmly fixed Santoprene gasket ideal for movement tractability without shearing or breaking
- Allows minor shear movement
- Suitable for heavy pedestrian traffic and trollies
- Vapor and Fire Barriers are optionally available
- No bump structure is ADA compliant
- System is suitable for minor seismic movements

Straight Application BUS

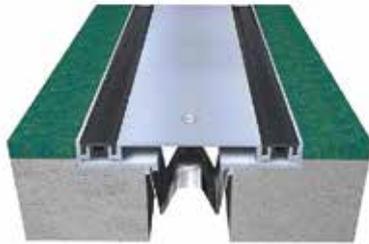

Seal Colors:

BK

BG

WH

GY

BU Series



INT. Application

Thermal Movement

FLOOR USE

WALL USE

Corner Application BUC

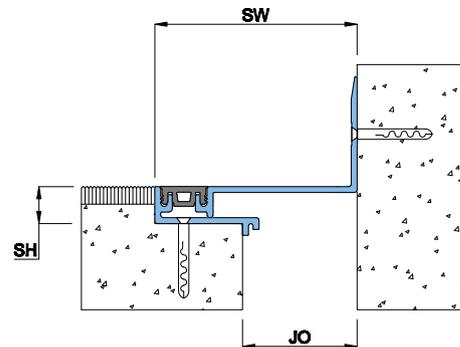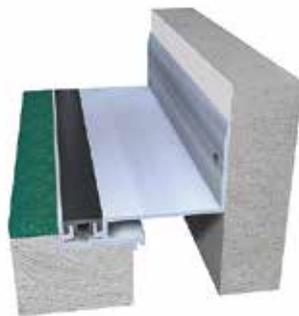

Details

Usage : Floor/Wall

Joint width : 2" - 8"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	BUS 02	51	16	125	25	25	Minor	3
	BUS 04	102	16	240	25	25	Minor	2
	BUS 06	152	16	290	16	16	Minor	1
	BUS 08	203	16	340	12	12	Minor	1
Corner (C)	BUC 02	51	16	90	12.5	12.5	Minor	3
	BUC 04	102	16	170	12.5	12.5	Minor	2
	BUC 06	152	16	220	8.5	8.5	Minor	1
	BUC 08	203	16	270	6	6	Minor	1

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.