


**Features**

- The ZBS Series fire stopping systems are designed to accommodate thermal movement that meets 2 hour fire ratings complying under UL 2079 hose stream test and ASTM E1399
- Designed for floor and wall applications
- System allows limited shear movements
- Compatible with most expansion joint

**Straight / Corner Application ZBS**

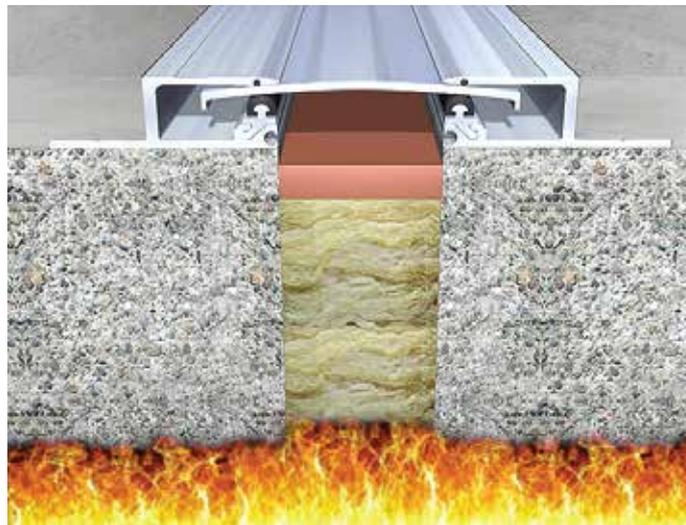


**ZB**  
Series

**Thermal**  
Movement

**FIRE**  
Barrier

**FLOOR**  
USE

**WALL**  
USE

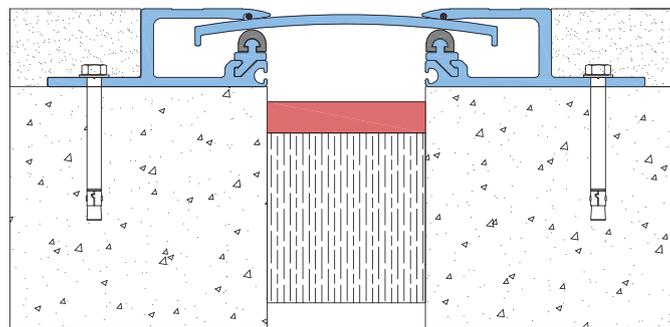

**Details**

Usage : Floor/Wall

Joint width : 1" - 6"

| Application                   | Code   | JO         | SH | SW | ± Movement (%) |          |         | Load (Ton) |
|-------------------------------|--------|------------|----|----|----------------|----------|---------|------------|
|                               |        | Millimeter |    |    | Horizontal     | Vertical | Shear   |            |
| Straight & Corner Application | ZBS 01 | 25         | *  | *  | 50             | 50       | Limited | *          |
|                               | ZBS 02 | 51         | *  | *  | 50             | 50       | Limited | *          |
|                               | ZBS 03 | 76         | *  | *  | 50             | 50       | Limited | *          |
|                               | ZBS 04 | 102        | *  | *  | 50             | 50       | Limited | *          |
|                               | ZBS 05 | 127        | *  | *  | 50             | 50       | Limited | *          |
|                               | ZBS 06 | 152        | *  | *  | 50             | 50       | Limited | *          |

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.