


Features

- System designed for gypsum dry wall / curtain wall
- Central plate allows swift shift between positive and negative movements
- For excellent result, choose to powder coat the cover plate to match neighboring wall finish
- System allows full seismic movements
- System allows excellent shear movements
- Suitable for interior/exterior applications
- Vapor and Fire Barriers are optionally available

Straight Application DCS

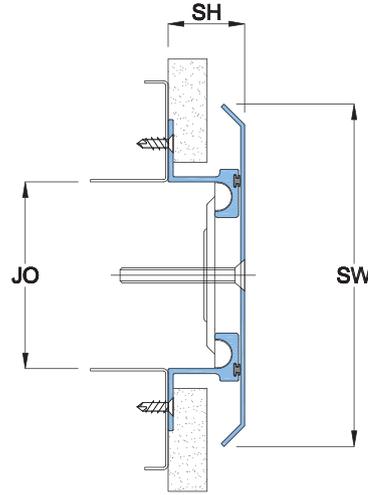

Powder Coat Finish:
Any RALColor



Anodized Finishes:



DC Series

EXT. Application


INT. Application

Seismic Movement

WALL USE

CEILING USE

Corner Application DCC

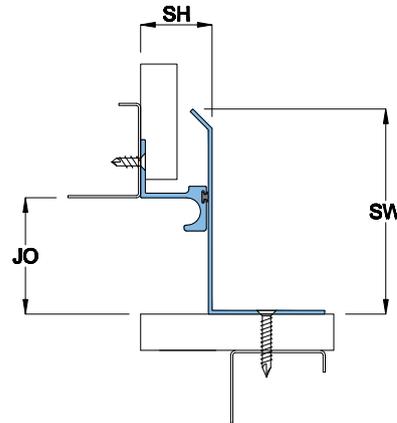

Details

Usage : Wall/Ceiling

Joint width : 2"-12"

Optional : Vapor/Fire Barrier

Wider Joint Cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	DCS 02	51	32	102	50	50	Excellent	*
	DCS 03	76	32	140	50	50	Excellent	*
	DCS 04	102	32	178	50	50	Excellent	*
	DCS 06	152	32	254	50	50	Excellent	*
	DCS 08	203	32	330	50	50	Excellent	*
	DCS 12	305	32	483	50	50	Excellent	*
Corner (C)	DCC 02	51	32	98	50	25	Excellent	*
	DCC 03	76	32	127	50	25	Excellent	*
	DCC 04	102	32	164	50	25	Excellent	*
	DCC 06	152	32	242	50	25	Excellent	*
	DCC 08	203	32	317	50	25	Excellent	*
	DCC 12	305	32	469	50	25	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.