
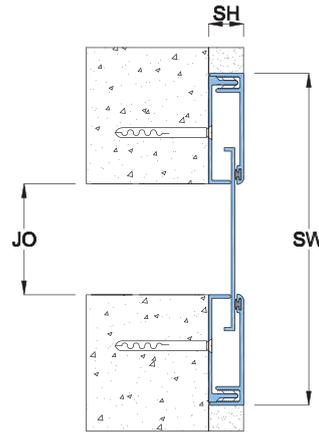


Features

- System designed to be installed in recessed wall
- For excellent result, choose to powder coat the system to match neighboring wall finish
- System allows full seismic movements
- System allows excellent shear movements
- Extremely popular with architects and interior designers due to its quality to seamlessly blend with neighboring finishes
- Vapor and Fire Barriers are optionally available

Straight Application CBS

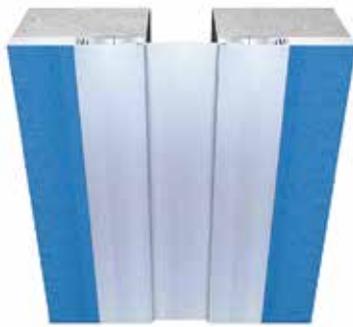

Powder Coat Finish:
Any RALColor





Anodized
Finishes:



- CB Series
- EXT. Application
- INT. Application
- Seismic Movement
- WALL USE
- CEILING USE

Corner Application CBC

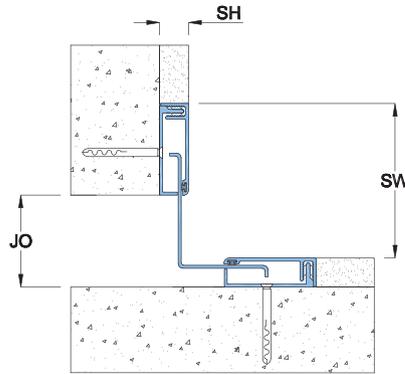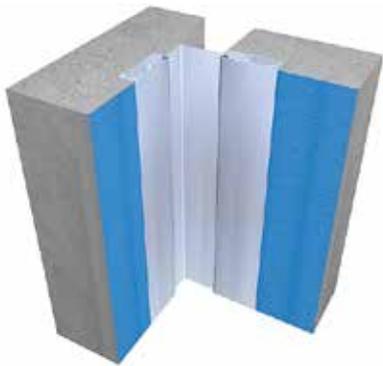

Details

Usage : Wall/Ceiling

Joint width : 1" - 6"

Optional : Vapor/Fire Barrier

Wider Joint Cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	CBS 01	25	16	127	50	25	Excellent	*
	CBS 02	51	16	152	50	25	Excellent	*
	CBS 03	76	16	229	50	25	Excellent	*
	CBS 04	102	16	254	50	25	Excellent	*
	CBS 06	152	16	357	50	25	Excellent	*
Corner (C)	CBC 01	25	16	60	25	25	Excellent	*
	CBC 02	51	16	86	25	25	Excellent	*
	CBC 03	76	16	137	25	25	Excellent	*
	CBC 04	102	16	162	25	25	Excellent	*
	CBC 06	152	16	238	25	25	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.