


Features

- Heavy duty laminated rubber joint with aluminum Cover
- Ideal for bridge/parking decks and ports
- Aluminum cover designed to withstand heavy traffic
- Provides smooth transition for wheeled traffic
- UV stabilized
- Acid and Alkali resistant
- Resistant to high level impact and abrasion due to heavy traffic
- System allows minor seismic movements

Bridge Deck Joint LTS

- LT Series
- EXT. Application
- Heavy Duty
- Water
- Thermal Movement
- FLOOR USE

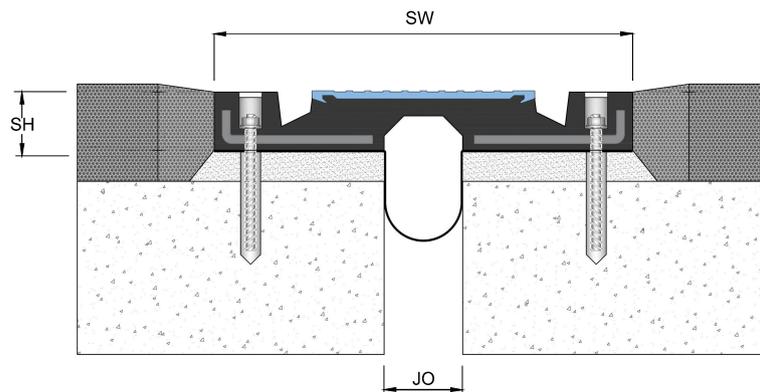

Details

Usage : Bridge Deck

Joint width : 1"-10"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	LTS 01	25	32	271	25	*	*	20
	LTS 02	51	43	272	25	*	*	20
	LTS 03	76	46	353	25	*	*	20
	LTS 04	102	56	590	25	*	*	20
	LTS 06	152	60	726	25	*	*	20
	LTS 10	254	78	890	25	*	*	20

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.