
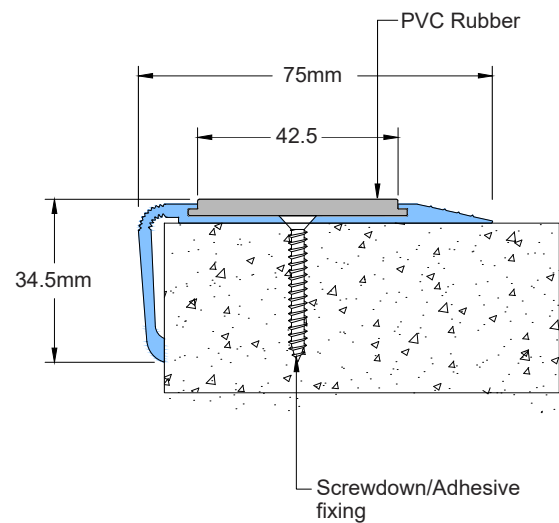


Features

- System designed for indoor application
- Double component nosing
- 1-5/8" (42.5mm) wide single PVC rubber
- Easy installation & maintenance
- 3" (75mm) tread area
- Available in 4 standard PVC options
- 1-3/8" (34.5mm) riser area
- Standard profile length 10' (3 meters)
- Factory cut & drilled option available
- Suitable for dry / wet anchoring
- Made of construction grade aluminum alloy 6063 T6

SNM 03 Screwdown Fixing

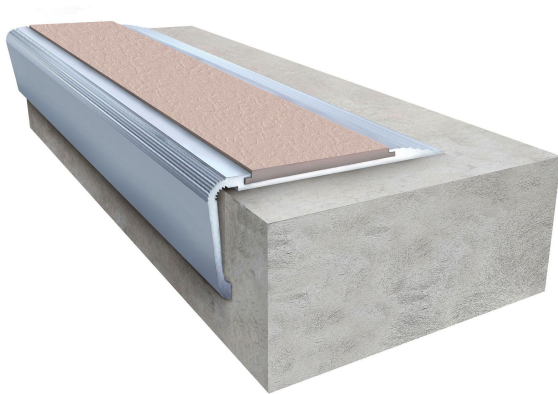

Color Options:




BK



GY



WH



BG

Special Note: Customer is encouraged to locally source anchors and construction grade external adhesive for fixing because the local conditions vary from country to country