
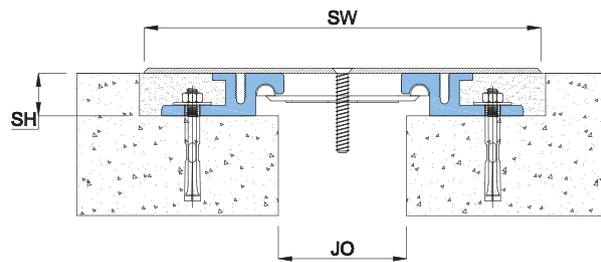



Features

- System designed to be installed in recessed floor/wall
- Central plate of 304 or 316 grade Stainless Steel accommodates various floor finishes
- Steel central flanges allows swift shift between positive and negative movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available
- System allows excellent shear movements
- System allows full seismic movements

Straight Application GBS

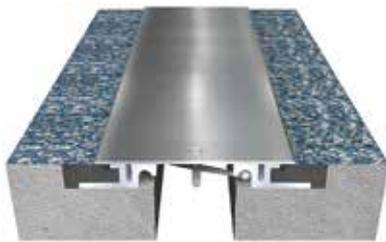

Corner Application GBC

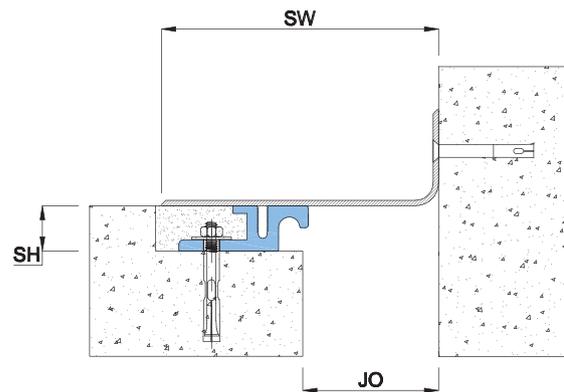

- GB Series
- EXT. Application
- INT. Application
- Seismic Movement
- FLOOR USE
- WALL USE

Details

Usage : Floor/Wall

Joint width : 2"-12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	GBS 02	51	25	150	50	50	Excellent	3.5
	GBS 03	76	25	185	50	50	Excellent	3.5
	GBS 04	102	25	220	50	50	Excellent	3.5
	GBS 06	152	25	300	50	50	Excellent	3
	GBS 08	203	25	375	50	50	Excellent	3
	GBS 10	254	25	460	50	50	Excellent	3
	GBS 12	305	25	525	50	50	Excellent	3
Corner (C)	GBC 02	51	25	100	50	13	Excellent	3.5
	GBC 03	76	25	130	50	13	Excellent	3.5
	GBC 04	102	25	170	50	13	Excellent	3.5
	GBC 06	152	25	245	50	13	Excellent	3
	GBC 08	203	25	320	50	13	Excellent	3
	GBC 10	254	25	395	50	13	Excellent	3
	GBC 12	305	25	475	50	13	Excellent	3

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.