
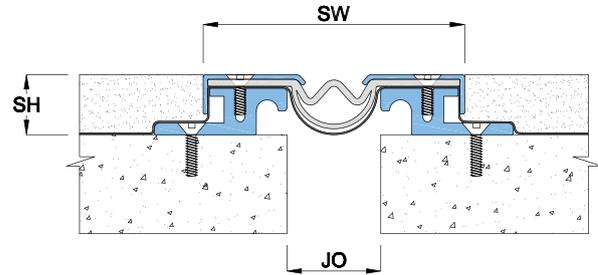


Features


- System designed for water tight installation
- Resists heavy duty loads
- Ideal for bridges as well as commercial kitchens
- EPDM / Neoprene Seal can be replaced easily and without much tools
- Resistant to -40°C to +150°C ambient temperature
- Available in Aluminum
- Resistant to salt and waste water
- System designed for heavy duty application
- Firmly anchored EPDM / Neoprene Seal is ideal for movement tractability as well as water tightness
- System suitable for minor seismic movements
- No bump structure is ADA compliant

Straight Application ALS

- AL Series
- EXT. Application
- INT. Application
- Heavy Duty
- Water
- Thermal Movement
- FLOOR USE

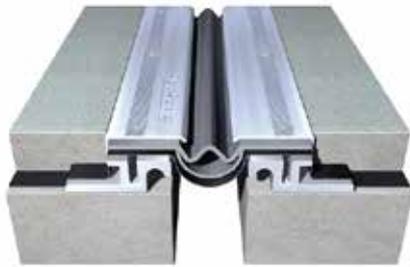

Corner Application ALC

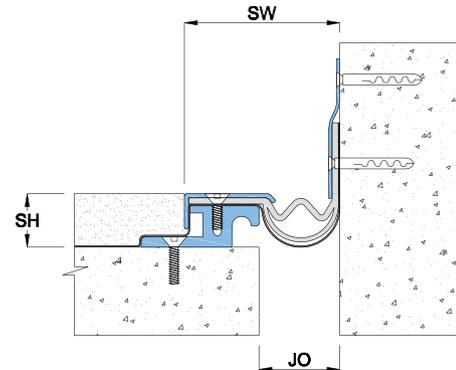

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	ALS 01	25	35	122	50	50	*	5
	ALS 02	51	35	143	50	50	*	5
	ALS 03	76	35	170	50	50	*	5
	ALS 04	102	35	194	50	50	*	5
Corner (C)	ALC 01	25	35	74	50	50	*	5
	ALC 02	51	35	96	50	50	*	5
	ALC 03	76	35	123	50	50	*	5
	ALC 04	102	35	148	50	50	*	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.