
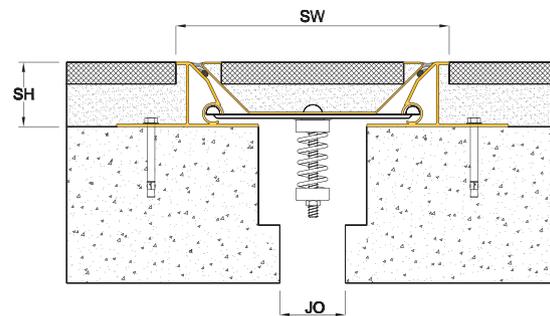


## Features


- System designed to be installed in recessed floor
- Available in Brass
- Steel central flange allows swift shift between positive and negative movements
- Negligible sight line makes system popular
- Seismic Pan System for accommodating various floor finishes
- Specially designed spring assembly under pan provides swift correction after seismic movement and silent passage to pedestrians and wheels
- System allows full seismic movements
- System allows excellent shear movement
- Load rated subject to joint opening
- ADA compliant
- Vapor and Fire Barriers are optionally available

### Straight Application EBS

- EB**  
Series
- INT.**  
Application
- Seismic**  
Movement
- FLOOR**  
USE

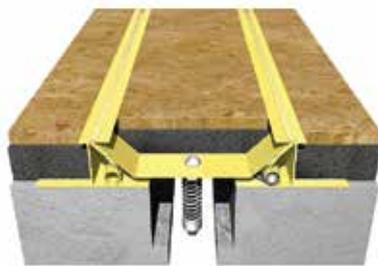

### Corner Application EBC

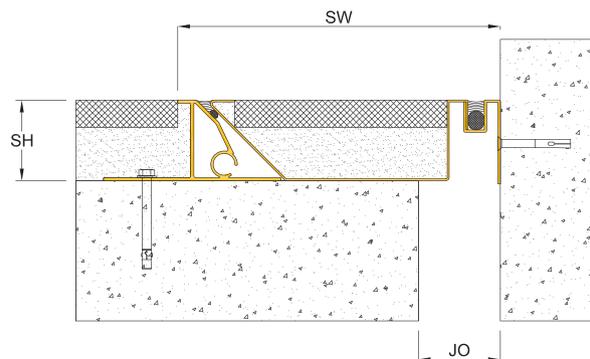

## Details

Usage : Internal Floor

Joint width : 2" - 8"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	EBS 02	51	50	206	100	12.5	Excellent	3
	EBS 03	76	50	231	100	12.5	Excellent	2
	EBS 04	102	50	257	100	12.5	Excellent	1
	EBS 06	152	50	308	100	12.5	Excellent	1
	EBS 08	203	50	359	100	12.5	Excellent	1
Corner (C)	EBC 02	51	50	206	100	12.5	Excellent	3
	EBC 03	76	50	231	100	12.5	Excellent	2
	EBC 04	102	50	257	100	12.5	Excellent	1
	EBC 06	152	50	308	100	12.5	Excellent	1
	EBC 08	203	50	359	100	12.5	Excellent	1

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.