


Features

- System designed for external floor/wall applications
- Waterproof / Water tight
- Excellent for seamless installation in curves and radius
- UV stabilized
- For excellent result, choose from 26 color options
- System allows full seismic movements
- System allows excellent shear movements
- Suitable for interior / exterior applications
- Supplied pre-compressed for easy installation
- Meets acoustic requirements range up to 72 STC
- Optionally available in 2 hour fire rated quality conforming to UL 2079 hose stream test and ASTM C518-04

Straight / Corner Application IBS

- IB Series
- EXT. Application
- INT. Application
- Seismic Movement
- FLOOR USE
- WALL USE

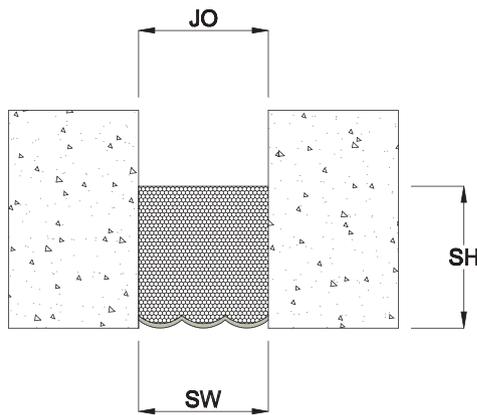

Details

Usage : Floor/Wall

Joint width : 1" - 8"

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight / Corner	IBS 01	25	38	25	75	50	Excellent	*
	IBS 02	51	51	51	75	50	Excellent	*
	IBS 03	76	76	76	75	50	Excellent	*
	IBS 04	102	102	102	75	50	Excellent	*
	IBS 05	127	102	127	75	50	Excellent	*
	IBS 06	152	102	152	75	50	Excellent	*
	IBS 07	178	127	178	75	50	Excellent	*
	IBS 08	203	127	203	75	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.