


Features

- System designed to be installed in recessed floor
- Cover plate of heavy duty galvanized steel
- Highly recommended for heavy traffic ramps and carpark bridges
- System allows full seismic movements
- System allows excellent shear movements

Straight Application GTS

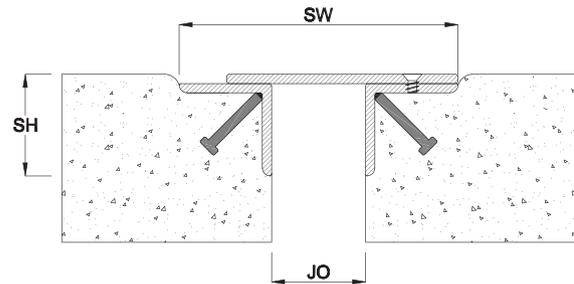

GT
Series


EXT.
Application

INT.
Application

Seismic
Movement

FLOOR
USE

Corner Application GTC

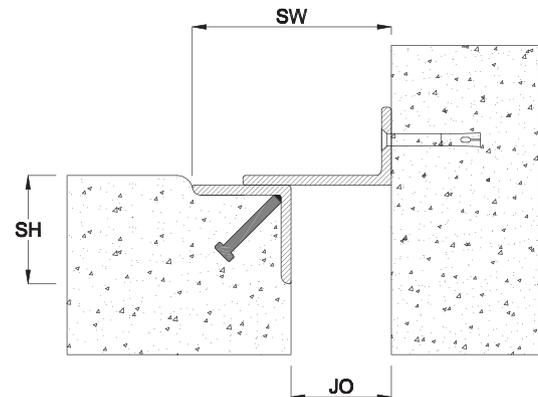

Details

Usage : Floor

Joint width : 2" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	GTS 02	51	55	151	50	*	*	10
	GTS 03	76	80	226	50	*	*	10
	GTS 04	102	105	302	50	*	*	10
Corner (C)	GTC 02	51	55	101	50	*	*	10
	GTC 03	76	80	151	50	*	*	10
	GTC 04	102	105	202	50	*	*	10

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.