
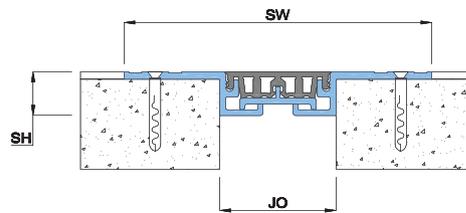


## Features

- Surface mounted system designed for retrofit installation
- Installation is recommended with PVC/VCT/LVT/Rubber floor finishes
- Firmly fixed Santoprene gasket ideal for movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- Allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available



### Straight Application ACS

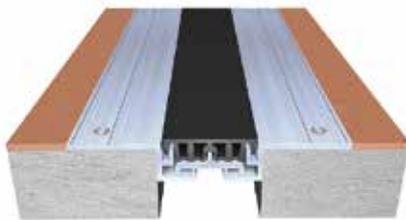

Seal Colors:

- BK
- BG
- WH
- GY

### Corner Application ACC

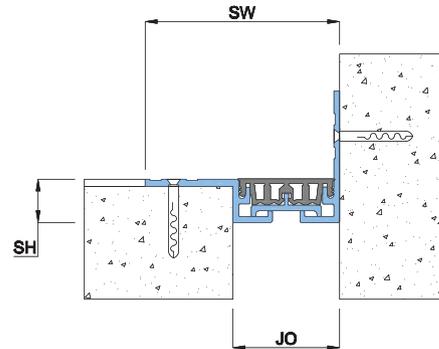

- AC Series
- EXT. Application
- INT. Application
- Thermal Movement
- FLOOR USE
- WALL USE
- CEILING USE

## Details

Usage : Floor/Wall/Ceiling

Joint width : 1" - 3"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ACS 01	25	11	121	25	25	Narrow	3
	ACS 02	51	19	142	25	25	Narrow	2
	ACS 03	76	21	152	25	25	Narrow	2
Corner (C)	ACC 01	25	11	73	25	25	Narrow	3
	ACC 02	51	19	95	25	25	Narrow	2
	ACC 03	76	21	114	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.